



Energy Division

Raychem CSJA

In-line Cold Shrinkable Joints for 1/C Shielded Power Cables (15-35 kV)

Tyco Electronics introduces the “All-in-One” CSJA cold shrinkable joint for 15 kV through 35 kV. It is designed to splice tape shield, wire shield, LC shield, UniShield, JCN and flat strap shielded cables.

Features

- This cable joint has a pre-expanded EPDM re-jacketing sleeve and an integrated neutral sock. The “All-in-One” design is easy to install with minimal steps and short installation time.
- A pre-expanded, single-piece silicone rubber joint body with high mechanical expansion capability allows a wide application range.

- An ergonomically designed spiral holdout provides a smooth installation with low release forces.
- Total length of the splice body on the holdout is 14 to 19 inches providing a compact design.
- The silicone rubber body provides high dielectric strength, high tear strength, low tension set, and excellent low temperature recovery.
- Integrated electrical stress control enhanced by factory molded stress cones and a Faraday cage.


- Void filling stress relief mastics are not necessary.
- Proven shield continuity concept which can also bridge concentric neutrals.
- The joint accepts both mechanical and compression connectors.
- When a ShearBolt connector is used, this is a totally crimpless system.
- Meets IEEE-404 requirements for 15 kV through 35 kV.
- Each silicone splice body is factory tested to include AC withstand and partial discharge in accordance with IEEE-404 production tests.



 **Tyco Electronics**

Our commitment. Your advantage.

Selection Information: Dimensions in Inches (millimeters)

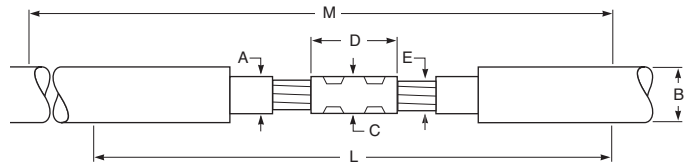

Voltage Class	Catalog Number	Nominal Cable Range	Min/Max Insulation OD		Max Jacket OD	Neutral Sock (AWG)	Connector Dimensions		Kit Installed Length	Required Installation Space
			A	B			C	D		
CSJA Joint without Connector										
15kV	CSJA-1521	#2 - 350	0.69 - 1.20 (17.5 - 30.5)	1.50 (38.1)	1/0	1.30 (33.0)	5.50 (140.0)	29 (737)	39 (990)	
15kV	CSJA-1522	4/0 - 750	0.87 - 1.40 (22.1 - 35.6)	1.80 (46.0)	1/0	1.50 (38.0)	5.50 (140.0)	29 (737)	39 (990)	
15kV	CSJA-1523	350 - 1000	1.03 - 1.58 (26.2 - 40.0)	2.05 (52.1)	2/0	1.65 (42.0)	6.69 (170.0)	33 (838)	43 (1090)	
15kV	CSJA-1524	750 - 1250	1.28 - 2.05 (32.50 - 52.0)	2.60 (66.0)	2/0	1.85 (47.0)	7.90 (200.0)	37 (939)	49 (1244)	
28kV	CSJA-2822	#1 - 500	0.87 - 1.40 (22.1 - 35.6)	1.80 (46.0)	1/0	1.50 (38.0)	5.50 (140.0)	29 (737)	39 (990)	
28kV	CSJA-2823	4/0 - 750	1.03 - 1.58 (26.20 - 40.0)	2.05 (52.1)	2/0	1.65 (42.0)	6.69 (170.0)	33 (838)	43 (1090)	
28kV	CSJA-2824	500 - 1250	1.28 - 2.05 (32.50 - 52.0)	2.60 (66.0)	2/0	1.85 (47.0)	7.90 (200.0)	37 (939)	49 (1244)	
35kV	CSJA-3523	1/0 - 350	1.03 - 1.49 (26.20 - 37.8)	2.05 (52.1)	2/0	1.40 (35.6)	5.50 (140.0)	33 (838)	43 (1090)	
35kV	CSJA-3524	350 - 1000	1.36 - 2.05 (34.54 - 52.0)	2.60 (66.0)	2/0	1.96 (50.0)	7.90 (200.0)	37 (939)	49 (1244)	
35kV	CSJA-3525	750 - 1250	1.63 - 2.36 (41.40 - 60.0)	2.60 (66.0)	2/0	2.36 (60.0)	7.90 (200.0)	37 (939)	49 (1244)	

Voltage Class	Catalog Number	Nominal Cable Range	Min/Max Insulation OD		Max Jacket OD	Neutral Sock (AWG)	Min/Max Diameter Over Cable Conductor*	Kit Installed Length	Required Installation Space
			A	B					
CSJA Joint with Copper Mechanical ShearBolt Connector									
15kV	CSJA-1521M1	2/0 - 350	0.69 - 1.20 (17.5 - 30.5)	1.50 (38.1)	1/0	0.376 - 0.736 (9.50 - 18.7)	29 (737)	39 (990)	
15kV	CSJA-1522M1	4/0 - 500	0.87 - 1.40 (22.1 - 35.6)	1.80 (46.0)	1/0	0.376 - 0.736 (9.50 - 18.7)	29 (737)	39 (990)	
15kV	CSJA-1522M2	350 - 750	0.87 - 1.40 (22.1 - 35.6)	1.80 (46.0)	1/0	0.570 - 0.945 (14.5 - 24.0)	29 (737)	39 (990)	
15kV	CSJA-1523M2	350 - 750	1.03 - 1.58 (26.2 - 40.0)	2.05 (52.1)	2/0	0.570 - 0.945 (14.5 - 24.0)	33 (838)	43 (1090)	
28kV	CSJA-2822M1	2/0 - 500	0.87 - 1.40 (22.1 - 35.6)	1.80 (46.0)	1/0	0.376 - 0.736 (9.50 - 18.7)	29 (737)	39 (990)	
28kV	CSJA-2823M2	350 - 750	1.03 - 1.58 (26.2 - 40.0)	2.05 (52.1)	2/0	0.570 - 0.945 (14.5 - 24.0)	33 (838)	43 (1090)	
28kV	CSJA-2824M2	500 - 750	1.28 - 2.05 (32.50 - 52.0)	2.60 (66.0)	2/0	0.570 - 0.945 (14.5 - 24.0)	37 (939)	49 (1244)	
35kV	CSJA-3523M1	2/0 - 350	1.03 - 1.49 (26.20 - 37.8)	2.05 (52.1)	2/0	0.376 - 0.736 (9.50 - 18.7)	33 (838)	43 (1090)	
35kV	CSJA-3524M2	350 - 750	1.36 - 2.05 (34.54 - 52.0)	2.60 (66.0)	2/0	0.570 - 0.945 (14.5 - 24.0)	37 (939)	49 (1244)	

* Min/max diameter over cable conductor accepted by the copper mechanical connector.

Voltage Class	Catalog Number	Nominal Cable Range	Min/Max Insulation OD		Max Jacket OD	Neutral Sock (AWG)	Min/Max Diameter Over Cable Conductor *	Kit Installed Length	Required Installation Space
			A	B					
CSJA Joint with Aluminum Mechanical ShearBolt Connector									
15kV	CSJA-1521M4	#2 - 3/0	0.69 - 1.20 (17.5 - 30.5)	1.50 (38.1)	1/0	0.268 - 0.470 (6.80 - 11.9)	29 (737)	39 (990)	
15kV	CSJA-1521M5	#2 - 350	0.69 - 1.20 (17.5 - 30.5)	1.50 (38.1)	1/0	0.268 - 0.681 (6.80 - 17.3)	29 (737)	39 (990)	
15kV	CSJA-1522M6	4/0 - 500	0.87 - 1.40 (22.1 - 35.6)	1.80 (46.0)	1/0	0.423 - 0.813 (10.7 - 20.6)	29 (737)	39 (990)	
15kV	CSJA-1522M7	500 - 750	0.87 - 1.40 (22.1 - 35.6)	1.80 (46.0)	1/0	0.736 - 0.998 (18.7 - 25.3)	29 (737)	39 (990)	
15kV	CSJA-1523M8	350 - 750	1.03 - 1.58 (26.20 - 40.0)	2.05 (52.1)	2/0	0.616 - 0.998 (15.7 - 25.3)	33 (838)	43 (1090)	
15kV	CSJA-1524M9	750 - 1000	1.28 - 2.05 (32.50 - 52.0)	2.60 (66.0)	2/0	0.813 - 1.152 (20.6 - 29.2)	37 (939)	49 (1244)	
28kV	CSJA-2822M5	#1 - 350	0.87 - 1.40 (22.1 - 35.6)	1.80 (46.0)	1/0	0.268 - 0.681 (6.80 - 17.3)	29 (737)	39 (990)	
28kV	CSJA-2822M6	4/0 - 500	0.87 - 1.40 (22.1 - 35.6)	1.80 (46.0)	1/0	0.423 - 0.813 (10.7 - 20.6)	29 (737)	39 (990)	
28kV	CSJA-2823M8	350 - 750	1.03 - 1.58 (26.20 - 40.0)	2.05 (52.1)	2/0	0.616 - 0.998 (15.7 - 25.3)	33 (838)	43 (1090)	
28kV	CSJA-2824M8	500 - 750	1.28 - 2.05 (32.50 - 52.0)	2.60 (66.0)	2/0	0.616 - 0.998 (15.7 - 25.3)	37 (939)	49 (1244)	
28kV	CSJA-2824M9	750 - 1000	1.28 - 2.05 (32.50 - 52.0)	2.60 (66.0)	2/0	0.813 - 1.152 (20.60 - 29.2)	37 (939)	49 (1244)	
35kV	CSJA-3523M5	1/0 - 350	1.03 - 1.49 (26.20 - 37.8)	2.05 (52.1)	2/0	0.268 - 0.681 (6.8 - 17.3)	33 (838)	43 (1090)	
35kV	CSJA-3524M8	350 - 750	1.36 - 2.05 (34.54 - 52.0)	2.60 (66.0)	2/0	0.616 - 0.998 (15.7 - 25.3)	37 (939)	49 (1244)	
35kV	CSJA-3524M9	750 - 1000	1.36 - 2.05 (34.54 - 52.0)	2.60 (66.0)	2/0	0.813 - 1.152 (20.60 - 29.2)	37 (939)	49 (1244)	
35kV	CSJA-3525M10	1000 - 1250	1.63 - 2.36 (41.40 - 60.0)	2.60 (66.0)	2/0	1.060 - 1.251 (23.0 - 31.7)	37 (939)	49 (1244)	

* Min/max diameter over cable conductor accepted by the aluminum mechanical connector.

Cold-Applied External Grounding Kit

Catalog Number	Length of Moisture Blocked Braid	Braid (AWG)
CSJ-EG-1	24 (610)	#8
CSJ-EG-2	24 (610)	#6
CSJ-EG-3	24 (610)	#4

Ordering Information

- Selections are based on the typical dimensions of 100% insulated cables, manufactured in accordance with AEIC standard. Nominal insulation thickness (100%): 15kV: 175mils, 25kV: 260mils, 35kV: 345mils.
- Select the appropriate catalog number. Use the insulation OD, and jacket OD range as the final ordering criteria.
- For mechanical ShearBolt connector included in the kit confirm the correct connector selection according to the Min/Max diameter over the cable conductor from the tables.
- If external grounding is required, order the CSJ-EG kit.
- For other applications or if you have any questions, contact your Tyco Electronics representative.
- Standard package: 1kit per box.
- Related test reports: EDR-5430, EDR-5455, EDR-5513
- For AL Mechanical ShearBolt connector information request datasheet 9-1773440-4 and for CU request 165972.

Tyco Electronics Corporation
8000 Purfoy Road
Fuquay Varina, NC 27526-9349
Tel: 800.327.6996
Fax: 800.527.8350

E-mail: naenergy@tycoelectronics.com
<http://energy.tycoelectronics.com/csja>
www.tycoelectronics.com

Copyright 2006 - 2010 Tyco Electronics Corporation
All rights reserved.
8-1773445-0 E258-R 03/10

All of the above information, including drawings, illustrations and graphic designs, reflects our present understanding and is to the best of our knowledge and belief correct and reliable. Users, however, should independently evaluate the suitability of each product for the desired application. Under no circumstances does this constitute an assurance of any particular quality or performance. Such an assurance is only provided in the context of our product specifications or explicit contractual arrangements. Our liability for these products is set forth in our standard terms and conditions of sale. CSJA, Raychem, TE (logo) and Tyco Electronics are trademarks of the Tyco Electronics group of companies and its licensors. UniShield is a trademark of General Cable Technologies Corporation.

Energy Division - a pioneer in the development of economical solutions for the electrical power industry. Our product range includes: Cable accessories, connectors & fittings, electrical equipment, instruments, lighting controls, insulators & insulation enhancement and surge arresters.